Specification	Model	No	Page
	HDU−14 150Ω		1/1

1. Outer Appearance and Dimensions (unit : mm)

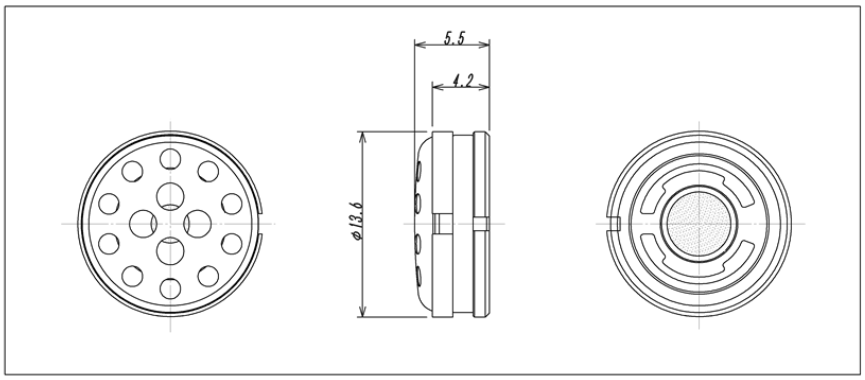

2. Electrical Specifications

2-1 Type	Dynamic (moving coil)
2-2 Sensitivity	−71dB ±3dB (0.5m distance method 0dB = 1V /1Pa)
2-3 Frequency Range	300Hz ～ 15kHz
2-4 Impedance	150Ω +20 −10% at 1kHz
2-5 Polar Pattern	Noise−Cancellation
2-6 Frequency Response	

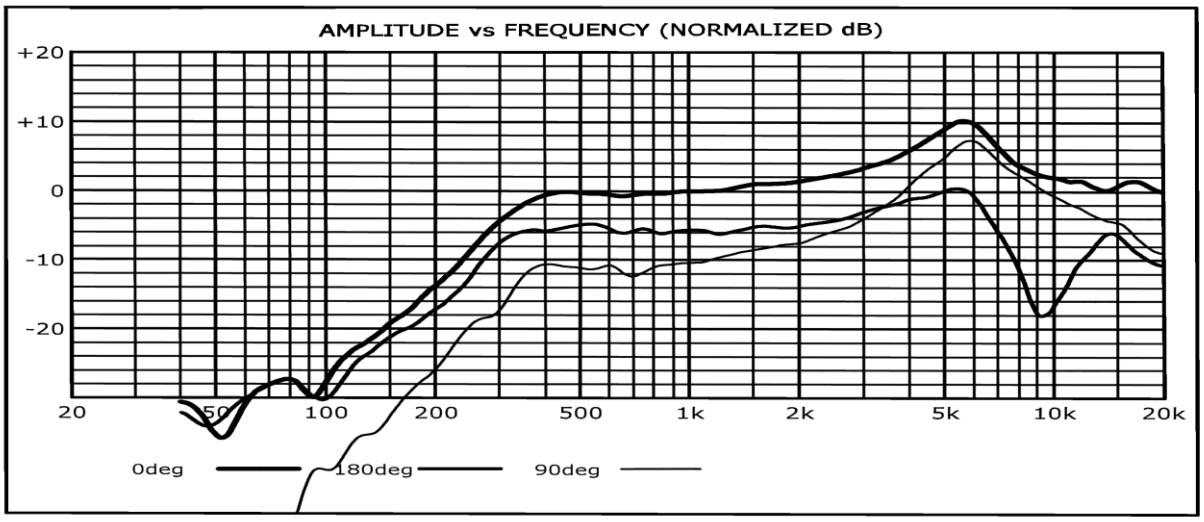

3. Weight 3.5g

4. Notice

Diaphragm 16μm Polyester (with corrugation)

Diaphragm with protective cover

RevNo.	Date	Revision note				
			Four-Leaf			